


HAZARDOUS LOCATION

Configuration Code XP07

Hazardous Location Explosion-Proof-Certified, Heat-Tracing RTD Assemblies

Explosion-Proof rated Heat-Tracing RTD assemblies are made for use in systems that measure the surface temperature of process pipe that is carrying products whose temperatures must be controlled to prevent freeze-up, or to maintain a viscosity level so that the inner medium will flow. They are intended for use in U.S. and Canadian hazardous areas and they are designed to extinguish flames inside the device, eliminating the potential for ignition of flammable mixtures in the surrounding atmosphere. FM and CSA certified assemblies, meet XP Class I Division I & II; Groups A, B, C, D; DIP Class II Division I; Groups E, F, G; Class III; Type 4/4X. These RTDs are offered in a variety of temperature ranges and are supplied with a 316SS sheath, and a 3/4" radius stainless steel mounting pad.

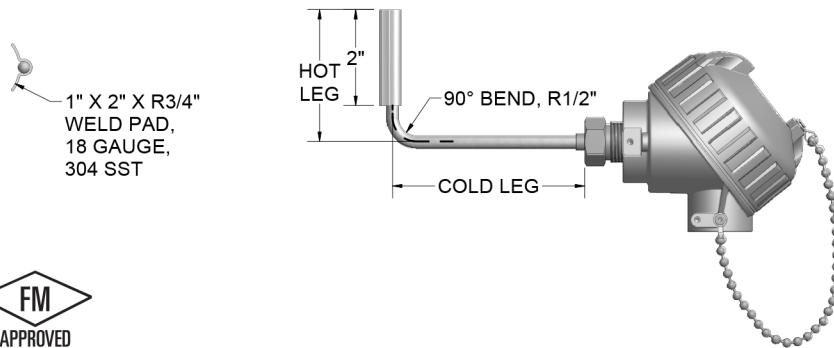

ORDER CODES

Example Order Number:

1-0 2-0 2-1 2-2 3-0 4-0 5-0 5-1
XP - RBF185L 48 3 - HT - 0304 - 18RD - 93, I

1-0 Agency Approval

CODE	DESCRIPTION
XP	FM/CSA explosion-proof-certified assembly

2-0 100 Ω Platinum RTD Elements $\alpha = 0.003\ 85\ ^\circ\text{C}^{-1}$

CODE	TOLERANCE ^[1]	TEMP. RANGE
SINGLE	DUPLEX	
R1T185L	R1T285L	Grade B (-200 to 200) °C
R5T185L	R5T285L	(1/5) Class B (-30 to 150) °C
RBF185L	RBF285L	Class B (-50 to 200) °C
RAF185L	RAF285L	Class A (-30 to 200) °C
RBF185M	RBF285M	Class B (-50 to 482) °C
R1T185H	R1T285H	Grade B (-200 to 600) °C
RAT185H	RAT285H	Class A (-100 to 450) °C

[1] Refer to RTD tolerance information in the General Information section for calculations to determine specific tolerance at temperature.

2-1 Sheath Diameters

CODE	DIAMETERS (inches) 316 SS
48	1/4
68	3/8

2-2 Element Connection

CODE	DESCRIPTION
2	2-wire element
3	3-wire element
4 ^[1]	4-wire element

[1] Not available with 440 Series Transmitter

3-0 Sheath Lengths

CODE	HOT LEG (inches)	COLD LEG (inches)
0304	3	4
0306	3	6
0308	3	8

Consult factory for other hot leg lengths or cold leg lengths.

4-0 Radius Mounting Pads

1" W x 2" L x 18 Ga. 304 SS

CODE	RADIUS (inches)	NPT PIPE SIZE (inches)
18RD	3/4	1 1/2

Mounting pad is flexible enough to be formed around pipe sizes from 1" to 12" NPS pipe.

5-0 Standard Head Terminations

CODE	DESCRIPTION
74	DIN form B aluminum explosion-proof head
75T-642B	(4 to 20) mA HART® field transmitter with aluminum explosion-proof housing
76T82-D10	(4 to 20) mA dual input HART® Field Transmitter with digital display and explosion-proof aluminum housing
77T-662C	(4 to 20) mA HART® Field Transmitter with dual cavity explosion-proof aluminum housing
93	Aluminum explosion-proof head
94	316L stainless steel explosion-proof head