


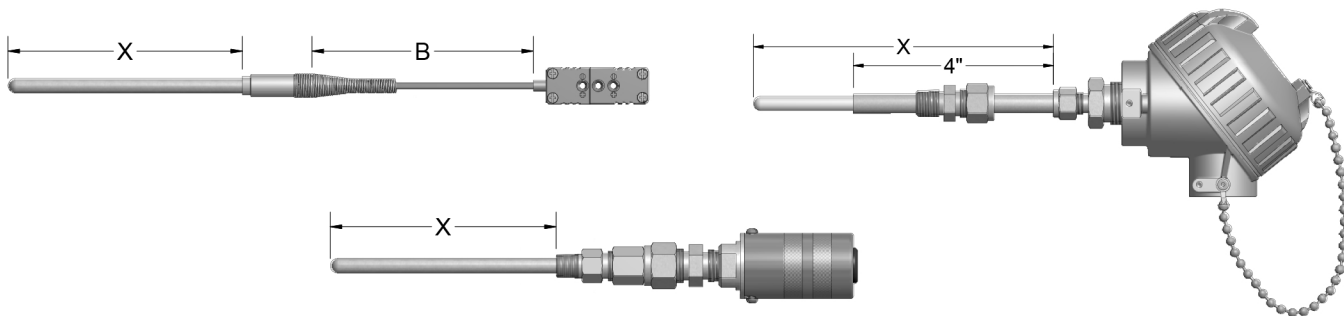

ORDER CODES

Example Order Number:

1 2 3 4 5 6 7
R24U - **403** - **24** - **05A** - **15** - **F1A036** - **4**

Select from preceeding pages

5 Plug and Jack Terminations

CODE	DESCRIPTION	SHEATH O.D. (inches)
4	Standard plug	3/16 thru 3/8
4,HT	Standard hi-temp plug 425 °C [797 °F]	3/16 thru 3/8
MC	Mating connector	

Head Terminations

CODE	DESCRIPTION
9CF31	Aluminum screw-cover head secured to sheath with SS compression fitting
8HN31 ^[1]	Aluminum screw-cover head with 1/2" NPT stainless steel hex fitting
9CF25	Mini nickel-plated steel head

Leadwire Transitions
(requires leadwire selections)

CODE	DESCRIPTION
15 ^[1]	Extension leadwire transition fitting with relief spring 204 °C [400 °F]
15HT ^[1]	Extension leadwire transition fitting with relief spring and High temperature potting 538 °C [1000 °F]

7 Terminations

CODE	DESCRIPTION
0	Leads not stripped
2	2" split leads, 1/4", stripped
3	2" split leads with spade lugs
4 ^[1]	Standard plug
6 ^[1]	Miniature plug

Options

CODE	DESCRIPTION
MC ^[1]	Mating connector

6 Extension Leadwire

CODE	WIRE GAUGE INSULATION DESCRIPTION	T/C AVAILABLE
F1	Solid; fiberglass insulation	R,S,B
F1A	Solid; fiberglass insulation with flexible S.S. armor	R,S,B
T1	Solid; fluoropolymer insulation	R,S
T1A	Solid; fluoropolymer insulation with flexible S.S. armor	R,S

To complete order code, insert wire code and 3 digit
"B" length code. Example: F1A036=36" "B" length

[1] Only with platinum elements in 303-403 sheaths.