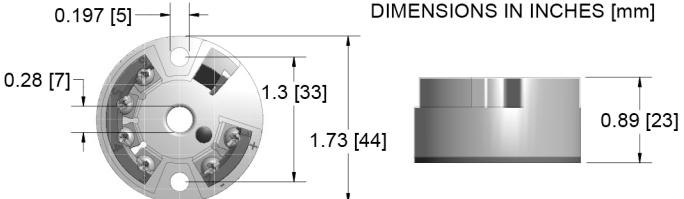






## MECHANICAL CONSTRUCTION

Dimensions	 <p>DIMENSIONS IN INCHES [mm]</p> <p>Top View Dimensions: 0.197 [5], 0.28 [7], 1.3 [33], 1.73 [44]</p> <p>Side View Dimensions: 0.89 [23]</p>
Weight	approximately 40 g
Materials	Housing: Polycarbonate • Potting: Polyurethane
Terminals	15 AWG (maximum)

## Terminal Connections

Power supply and current output		SETUP socket	
Sensor Connection		 <p>TC</p> <p>2-Wire RTD <math>\Omega</math></p> <p>3-Wire RTD <math>\Omega</math></p> <p>4-Wire RTD <math>\Omega</math></p>	

## Remote Operation

Configurable parameters	Sensor type and connection type, engineering units ( $^{\circ}\text{C}/^{\circ}\text{F}$ ), measurement range, internal/external cold junction compensation, cable resistance compensation on 2 wire connection, fault conditioning, output signal (4 to 20) mA or (20 to 4) mA, digital filter (damping), offset, measurement point identification (8 characters), output simulation
-------------------------	---

## Approvals

CE marked	Unit complies with the legal requirements set forth by the EU regulations.
	UL Recognized Component
 	General Purpose and non-incendive for use in hazardous locations Class I, Division 2 Groups A, B, C and D