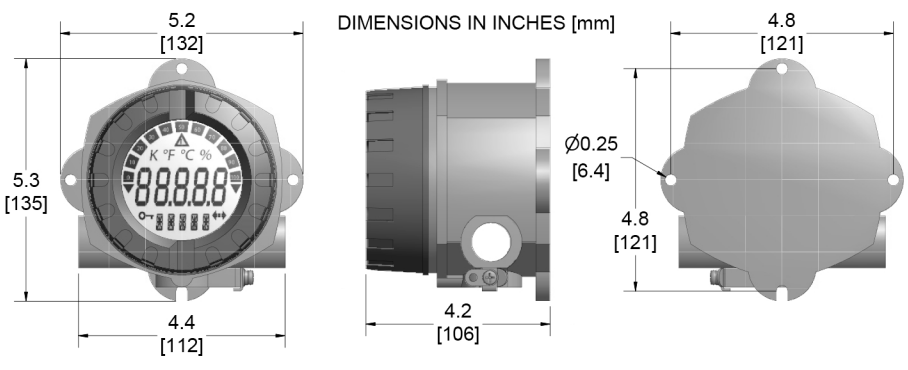
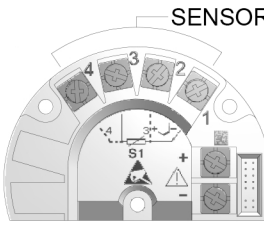









MECHANICAL CONSTRUCTION

<p>Dimensions</p>	 <p>DIMENSIONS IN INCHES [mm]</p> <p>5.2 [132] (width)</p> <p>5.3 [135] (height)</p> <p>4.4 [112] (display width)</p> <p>4.2 [106] (side view width)</p> <p>4.8 [121] (top view width)</p> <p>Ø0.25 [6.4] (hole diameter)</p> <p>4.8 [121] (top view height)</p> <p>Display rotatable in 90° increments</p>
<p>Weight</p>	<p>approximately 1.6 kg [3.53 lb]</p>
<p>Materials</p>	<p>Housing: die-cast aluminum with powder coating</p>
<p>Terminals</p>	<p>Cables / wires up to max. 2.5 mm² (AWG 13)</p>

Terminal Connections

 <p>SENSOR</p>	<p>HART® Communication on (4 to 20) mA</p>		
<p>Sensor</p> <p>TC</p> 	<p>2-wire</p> <p>Ω</p>  <p>RTD</p> 	<p>3-wire</p> <p>Ω</p>  <p>RTD</p> 	<p>4-wire</p> <p>Ω</p>  <p>RTD</p> 

Optional Mounting Bracket

Part Number: 10321

Designed for use on pipes with a diameter between 1.5" to 3.3".

The additional mounting plate must be used for pipes with a diameter of 1.5" to 2.2". No plate is required for pipes with a diameter of 2.2" to 3.3".

Assembly includes bracket, screws, and mounting plate.

