


INTERFACE

Display Elements

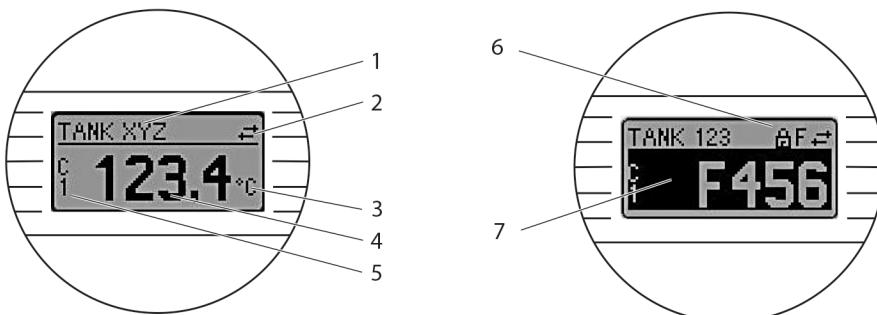

- Item 1: Displays the TAG
- Item 2: 'Communication' symbol
- Item 3: Unit display
- Item 4: Measured value display
- Item 5: Value/channel display S1, S2, DT, PV, I, %
- Item 6: 'Configuration locked' symbol
- Item 7: Status signals

Remote Operation

Interface	HART® (Version 6) communication via transmitter power supply
Configurable device parameters	Sensor type and connection type, engineering units (°C/°F), measurement ranges, internal/external cold junction, compensation of wire resistance with 2-wire connection, failure mode, output signal (4 to 20) mA (20 to 4) mA, digital filter (damping), offset, TAG+descriptor (8+16 characters), output simulation, analog output: option: customized linearization

APPROVALS

Approvals

CE marked	Unit complies with the legal requirements set forth by the EU regulations.
 	Intrinsically safe and non-incendive Class I, Division 1 and 2, Groups A, B, C and D