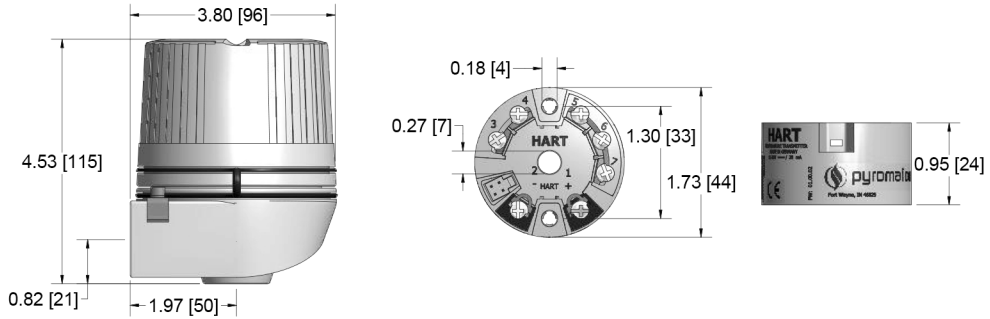










MECHANICAL CONSTRUCTION

Dimensions	 Side view dimensions: 3.80 [96] (width), 4.53 [115] (height), 0.82 [21] (base thickness), 1.97 [50] (base width). Top view dimensions: 0.18 [4] (display width), 0.27 [7] (display height), 1.30 [33] (terminal spacing), 1.73 [44] (terminal width). Display view dimensions: 0.95 [24] (display height).
Weight	Housing, transmitter, and display: approximately 970 g (2 1/4 lbs) Transmitter only: approximately 50 g (1/4 lb)
Materials	Housing: die-cast aluminum with powder coating
Terminals	15 AWG Maximum

Terminal Connections

			
TC SINGLE (INPUT 1)  DUPLEX (INPUT 2) 	2 WIRE RTD OR Ω  	3 WIRE RTD OR Ω  	4 WIRE RTD OR Ω  

HART® is a registered trademark of HART Communication Foundation